

Potable water supply
and distribution

natural 

Ductile iron pipes
and fittings system
DN 60 to DN 1000

Comprehensive pipeline solutions

PAM 
SAINT-GOBAIN

// 84% of the service life of a pipe is determined by its external coating.* //

** See page 7*

Summary

The revolution towards... Natural® BioZinalium®	pages 2-3
Ductile iron....a material you can trust	pages 4-5
Safety....and longevity.....	pages 6-7
BioZinalium protection®... durability, reliability, prevention	pages 8-9
BioZinalium protection®... pushing the boundaries	pages 10-11
The internal coatings...preservation of potable water	pages 12-13
Easy to assemble joints...and lockable.....	pages 14-15
Natural®, a complete... and efficient range.....	pages 16-17



natural[®] DN 60 to DN 600

Starting from 2014, the BioZinalium[®] coating will slowly replace the Zinalium[®] coating of the Natural[®] range.

If you wish to know more about the external coating of the Natural[®] pipes, please check our BioZinalium[®] brochure.

The revolution towards...




Always a coating ahead

The decree of 27.01.2012 requires the water authorities to make a detailed assessment of their network assets and to set the objectives of reducing the leakage rate within a defined budgetary framework. These concerns have a direct influence on maintenance, renewal and extension programmes for water networks and also encourage the choice of reliable and durable pipes.

BioZinalium® is a practical response of Saint-Gobain PAM to the genuine concerns of water network investors, managers and operators.

Saint-Gobain PAM's research into zinc-based coatings has constantly helped to improve the protection of buried networks of iron pipes, which still supply the majority of capital cities with potable water..


Saint-Gobain PAM, driving innovation

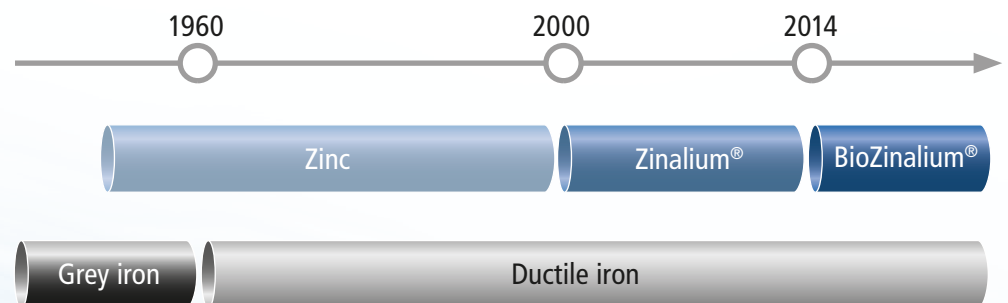

**In response to our
customers' requirements**

... Natural[®] BioZinalium[®] DN 60 to 600*

Zinalium[®] DN 700 to 1000

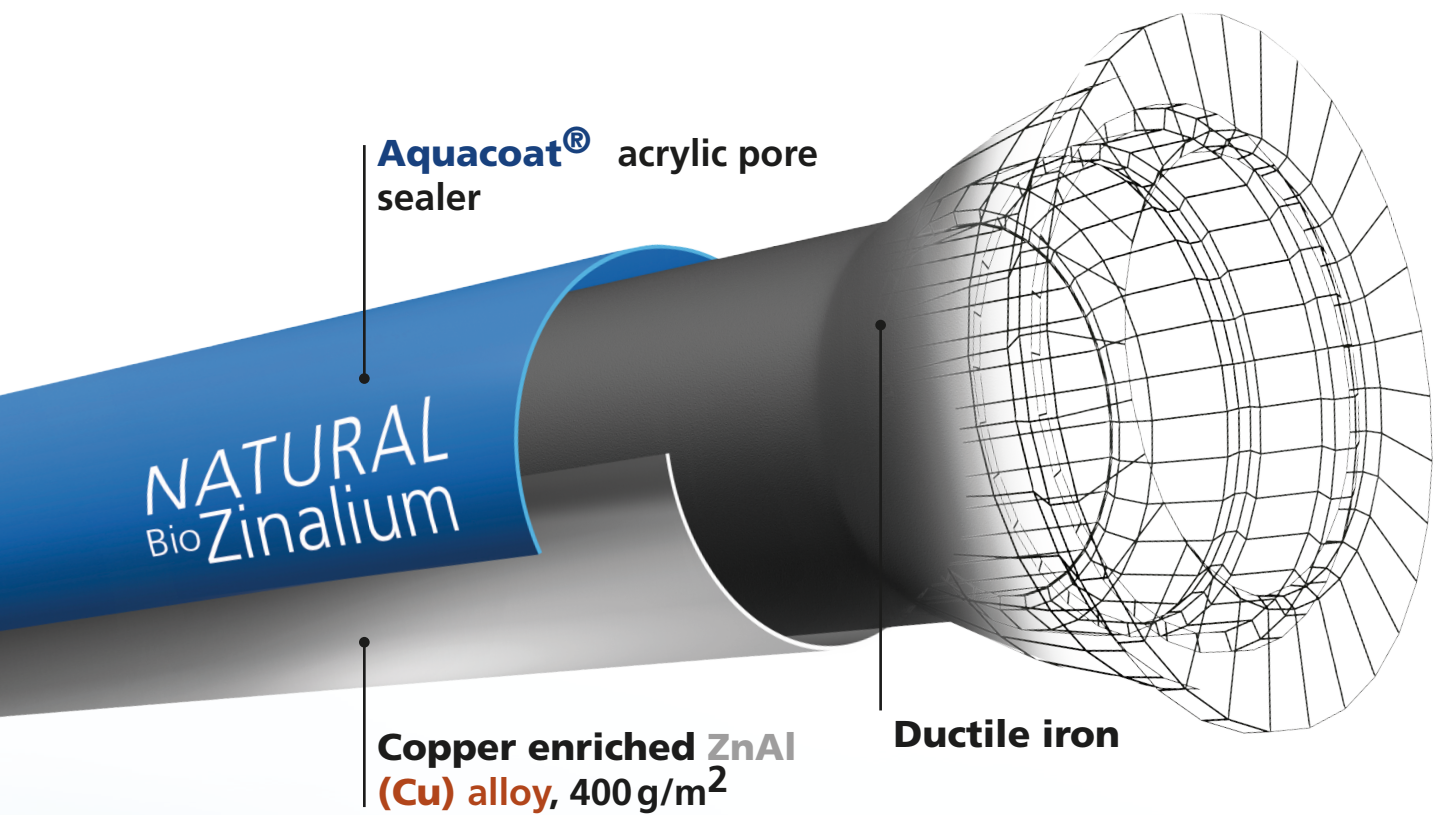

The BioZinalium[®] coating consists of 2 layers:

- A layer of zinc-aluminium 85/15 alloy, enriched with copper, with a minimum surface density of 400g/m²**, applied by spraying molten metal onto the surface of the iron, using an electric arc spray gun, from ZnAl (Cu) alloy wire.
- A protective layer of Aquacoat[®] (semi-permeable)** of water-based blue acrylic of average thickness of 80 microns applied using a spray gun.

* DN 350 to 600: on consultation

Ductile iron...

SAINT-GOBAIN PAM, more than 150 years of history and technical expertise

Founded in 1856, SAINT-GOBAIN is the world leader in the manufacture and commercialisation of ductile iron pipeline systems.

The emphasis placed on research and development has enabled the company to combine traditional know-how and technical innovation to continuously offer its customers high quality, reliable and ergonomic products.

Ductile iron

Ductile iron is an iron/carbon/silicon alloy containing pure carbon in a spheroidal graphite form.

➤ Exceptional mechanical properties

- Elasticity ($Re \geq 270$ MPa)
- Breaking strength ($Rm \geq 420$ MPa)
- Impact resistance
- High elongation capacity ($> 10\%$)


➤ A fully recyclable natural material

An alloy of iron, carbon and silicon, ductile iron is an exceptional material that can be 100% reused indefinitely.

It can be completely recycled with no loss of properties and is recyclable for the same application in non-restricting and non-hazardous industrial processes.

Recycled cast iron is used as a raw material in traditional steel and iron processes.




The PIPE division of the SAINT-GOBAIN group produces a large volume of cast iron in its factories which are mostly derived from recycled ferrous materials. These are ISO 14001 certified.



1 - In "ductile" iron, the graphite particles consist of small spheres, which prevent the risks of crack propagation. The material is no longer "fragile". It is "ductile" and resistant.

2 - Ductile iron can withstand major deformations: torsion of a bar.

3 - Deformation under exterior load of a large DN pipe.

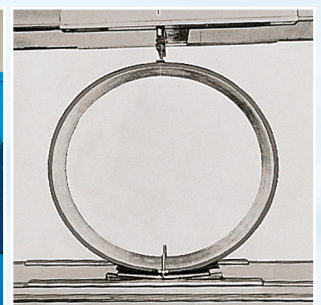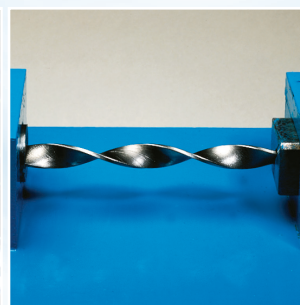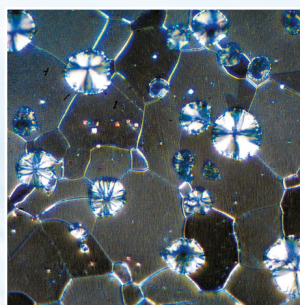

....a material you can trust

A material that has stood the test of time

Ductile cast iron benefits from the traditional longevity of cast irons with exceptional mechanical properties: elasticity of the metal, bending strength due to high elongation capacity, resistance to ovalisation, solidity and proven performance for over a century.

Due to these exceptional mechanical qualities, ductile iron is suitable for all types of terrain and can withstand high stress without damage (deep or shallow depths of cover, traffic loads, other site contingencies, etc.).

This explains why ductile iron and now the NATURAL[®] range has long been considered as the reference material for hydraulic networks and, especially, pressure pipelines.

More than 10,000 km of ductile iron pipelines designed by SAINT-GOBAIN PAM are laid every year, from DN 60 to DN 2000.

The quality

For SAINT-GOBAIN PAM, the notion of performance extends far beyond the products. It involves the entire company from product design to delivery.

The SAINT-GOBAIN PAM Quality Assurance system is based on the standard NF EN ISO 9001-2008 which certifies control of the main processes (design, production, commercialisation).

The plants responsible for manufacturing products of the NATURAL[®] range have been awarded this certification which was issued by a third party.



Quality Assurance
based on the standard
NF EN ISO 9001-2008.

Compliance with the standards and regulations

The SAINT-GOBAIN PAM products comply with national and international standards NF, EN and ISO. The compliance with these standards is certified by third-party organisations.

These standards define the product or service in terms of result; each product, pipe or fitting is individually tested in the plant during an internal pressure test.

Specification	French or European standard	International standard
Recommendations and test methods	NF EN 545 (1) (2)	ISO 2531 (1)
Cement mortar coating	NF EN 545 (1)	ISO 4179 (1)
Zinc-aluminium outer coating of the pipes	NF EN 545 (1)	-
Joint gaskets - material specification	NF EN 681-1 (1)	ISO 4633(1)
Locking system	-	ISO 10804-1

(1) compliance certified by a third-party organisation

(2) additionally, the seals comply with the specific recommendations of article 9 of the April 2003 edition (CCTG) and this compliance is certified by a third-party organisation.

The materials used by SAINT-GOBAIN PAM which are intended for contact with drinking water (coatings, elastomers, lubricating paste) have received a Sanitary Compliance Certificate (ACS) and conform to the provisions of the decree of 29 May 1997 and decree no.2007-49 of 11 January 2007, article R.1321-48. The blast furnace mortar cement of our plants of Foug and Pont-à-Mousson is conform to the positive reference lists.

The safety.....

The resistance to internal pressure

A safety coefficient of 3!

$$PFA = \frac{\text{DESIGN BURSTING PRESSURE}}{S_F} = \frac{20 \times e \times R_m}{D \times S_F}$$

S_F A safety coefficient of = 3

e = minimal thickness (mm)

R_m = tensile strength = 420 MPa

D = diameter (mm)

PFA = allowable pressure (bar)

- > In conformity with the specifications of the standard NF EN 545-2010, the pipes and fittings offer a considerable safety margin beyond the AOP (Allowable Operating Pressure): the safety coefficient is greater than 3.
- > In addition, the ductile iron material is not subject to any ageing and retains its mechanical strength over time.
- > The PFA* values of the pipes and fittings of the NATURAL® range comply with the standard NF EN 545-2010 (appendix A) and are always greater than 40 bar in sizes DN 60 to 300 and greater than 30 bar in sizes DN 350 to 600.

* refer to the table on page 17 for the PFA value.

Safe and economical laying

A buried pipeline is subject to vertical loads (weight of backfill, traffic loads) which it transmits to the ground via the trench bottom and the backfill.

Considerable forces are involved and there is interaction between pipe and soil.

Generally, to perform their role, the layers must be chosen and compacted according to:



- > the ability of the pipe to withstand local forces: risks of piercing or damage which could lead to cracks or create faults in the pipe wall,
- > the rigidity and strength of the pipe.

Robust and strong ductile iron pipes minimise the trench bottom and surrounding work so that the work involved in laying is safer and cheaper.

Flexible pipeline


The pipeline layout may include soft or unstable ground (marshy areas, subsidence caused by pumping ground water, mining lands, consolidation of road backfill, etc.). Pipelines must adapt to the ground movements and be able to withstand the mechanical stresses applied during these movements.

Within their limits of angular deflection and withdrawal, the STANDARD cup joints allow the pipeline to adapt to the deformations imposed by the ground movements.

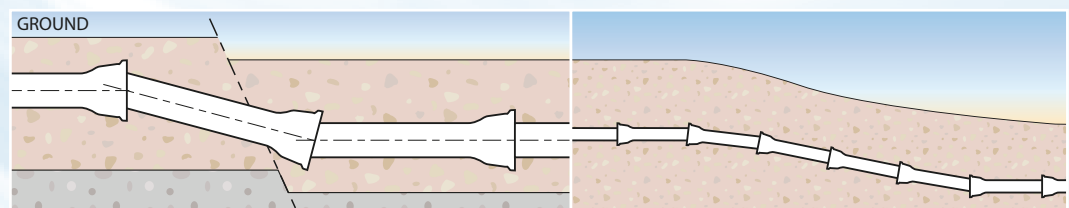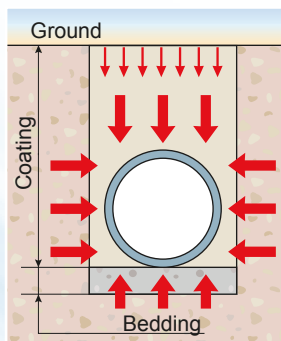

....and longevity

Contribution of the lining to the life expectancy

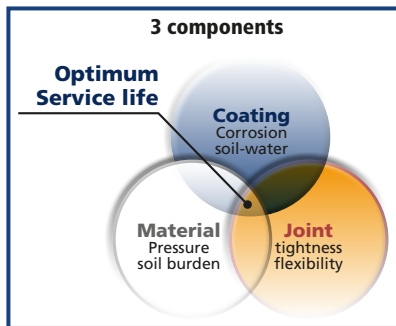

The optimum service life is achieved when the three components - material, coatings and assemblies - are perfectly reliable.

For the manufacturer of pipelines, the service life depends on the performance of the following three elements:

- The material: resistance to mechanical stresses (hydraulic pressure and ground weight),
- the coatings: resistance to chemical attacks (of water and soil),
- the assemblies: maintain waterproofness under all circumstances (excessive pressure or ground movement).

Saint-Gobain PAM has therefore developed an original and rational approach to individually assess the contribution of the coating to the service life:

their researchers have been working with a mathematical forecasting model that is totally unique of its kind world wide (in-house software). It is based on an algorithm which calculates cumulative probabilities capable of assessing the risk of perforation, taking into account:


- the laws of cast iron corrosion (rate of attack depending on the environment);
- the performance of the coatings in the different soil types encountered;
- the geological distribution of the soils and their blends;
- the vagaries of installation.

Taking into account these numerous variables, the probabilistic model can be used to assess the "life expectancy" of a pipe by adding the zinc/aluminium alloy conversion time, the delay in the passive conversion of the hydroxide layer of the alloy and the cast iron corrosion time.

**With this model, the life expectancy of a DN150 NATURAL[®] C40 EN 545:2010 pipe buried in soil of resistivity of 2,500 Ω .cm is estimated at 150 years.

The software has been calibrated from an analysis of around one hundred samples taken from existing networks.

Contribution of coating to life expectancy of an underground pipe

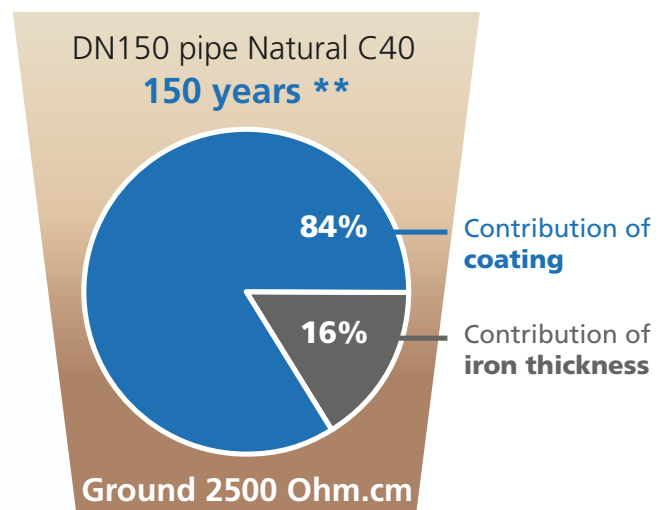

BioZinalium protection®...

Overall corrosion protection

The BioZinalium coating® retains the "active" properties of the Zinalium® coating when in contact with the ground, i.e.:

- formation of an adhesive and stable all-round protective layer (zinc hydroxides, etc.) that cover the entire surface of the buried pipe;
- restored continuity of this protective layer at points which have been slightly damaged (impacts during transportation, scrapes when backfilling).

The two-phase combination of aluminium and zinc in the ZnAl (Cu) alloy increases the strength of the overall protective layer. In comparison with pure zinc, it extends the areas of use (or the service life) in highly corrosive soils as defined in European standard EN545:2010 (appendix D.2.2.).

Guarantee against localised bio-corrosion

The copper enrichment of the ZnAl (Cu) alloy helps reduce the possible risk of localised bio-corrosion in the following situations by leveraging the bactericidal properties of copper:

- anaerobic soils (heavy soils, wet clay soils, etc.);
- soils rich in SO_4^{2-} -sulphates, organic matter;
- damage to the coating.

BioZinalium® therefore provides a brand new way of reducing this possible risk and thus increasing the guarantee of longevity.

Sustainable development commitment

The finishing coat (pore sealer) of BioZinalium® is produced using an emulsion of water-based acrylic PVDC resin which does not contain either organic solvents or Bisphenol A (BPA).



It contributes to:

- reducing emissions of volatile organic compounds (VOCs) into the atmosphere,
- complying with sanitary recommendations to reduce the risk of exposure for the population and the environment to BPA.

As an illustration, the move to acrylic paint in 2012 helped reduce VOC emissions by 24% in our Saint-Gobain PAM plants.




...durable, reliable, preventative

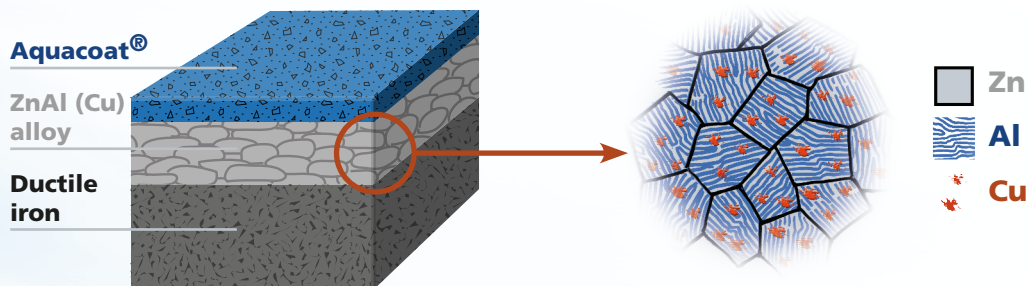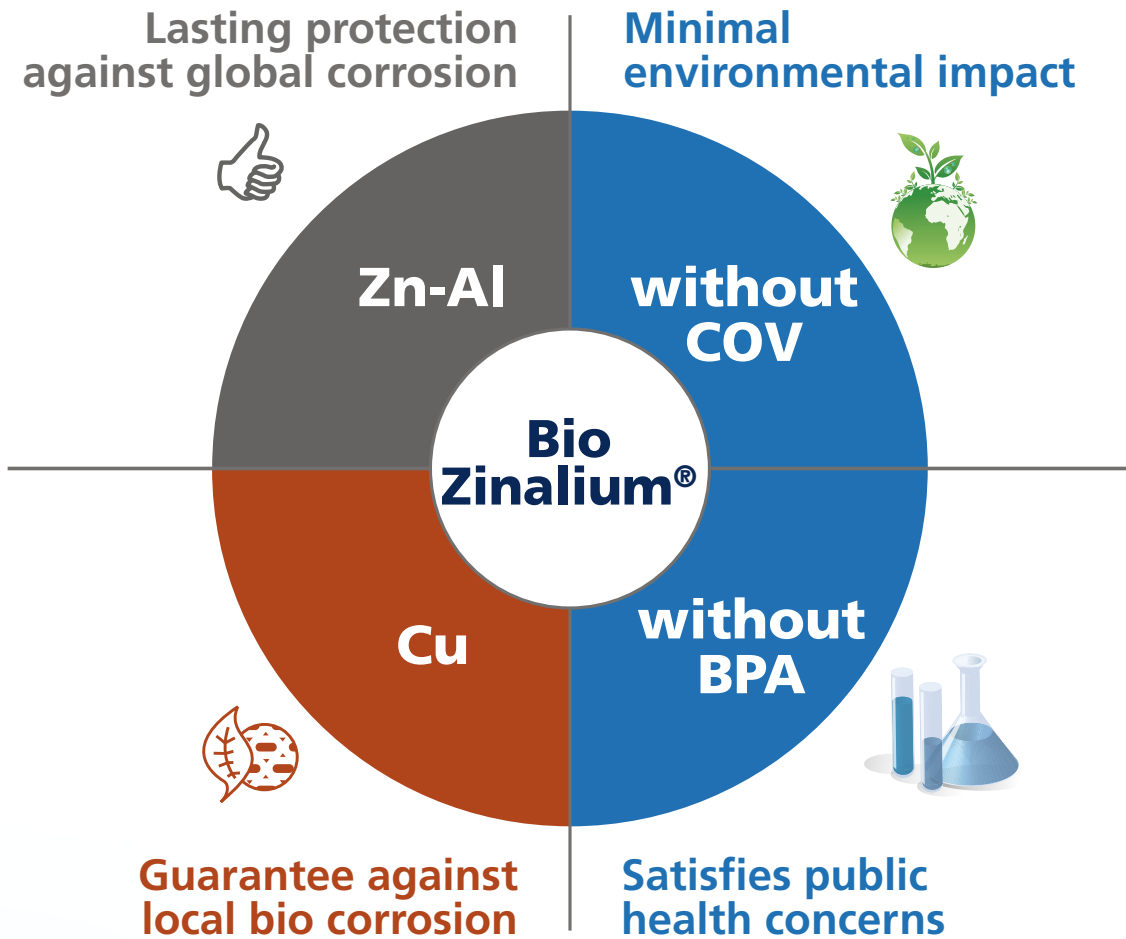

BioZinalium protection® ...

Advantages of BioZinalium®

The active nature of the metallic coating + the deposited surface mass + the properties of the finishing coat are the three dimensions that contribute to the efficiency of the zinc-based coating systems.

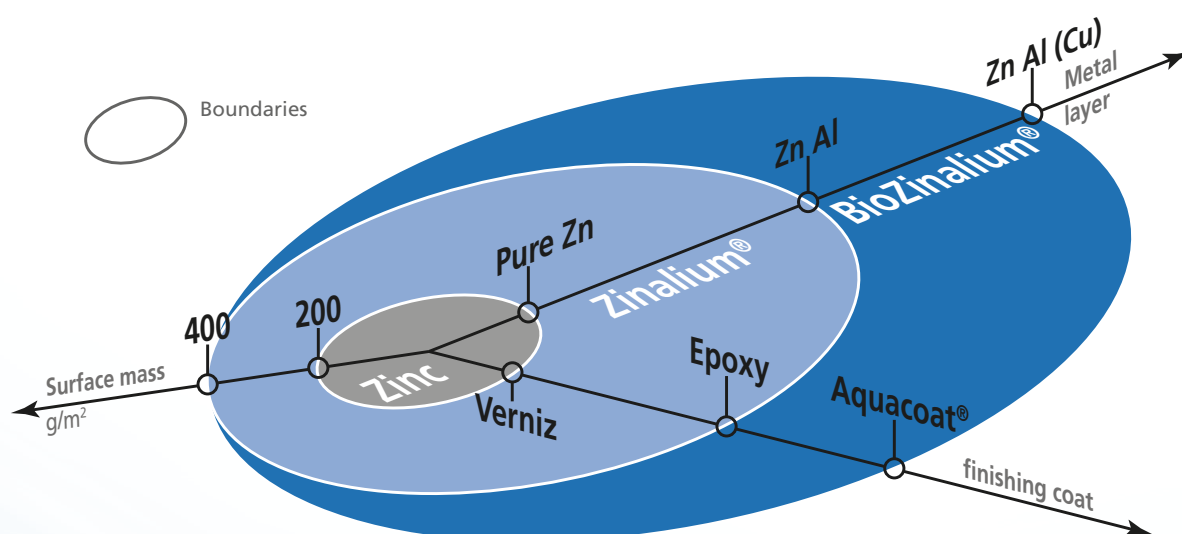

In compliance with the standards



The BioZinalium® coating is in conformity with the European standard EN545:2010 and the international standard ISO 2531. The BioZinalium coating® is suitable for the majority of soils as defined in appendix D.2.2. of the standard EN545:2010, with the exception of:

- soils located underneath the marine phreatic layer that has a resistivity of less than 500 Ω·cm;
- peaty and acidic soils;
- soils containing waste, ash, slag or contaminated with certain industrial wastes or effluents.

... pushing the boundaries

The advantages of BioZinalium®

PERFORMANCES \ CRITERIA	Zn	Zinalium®	BioZinalium®
Overall corrosion protection: Resistivity higher than: 2500 Ω.cm below the phreatic layer 1500 Ω.cm above the phreatic layer (cf standard EN 545: 2010 D.2.1)			
			+
Resistivity higher than: 500 Ω.cm below the phreatic layer (cf standard EN 545:2010, D.2.2)			+
Regeneration of the protection on coating scars			
Protection against localised bio-corrosion: Moist clay, presence of sulphates, organic matter, damage to coatings			+
Without COV (volatile organic compounds)			+
Without BPA (Bisphenol A)			+

Enriched with copper, BioZinalium® reduces the uncertain risk of localised bio-corrosion in the following situations:

- anaerobic soils (heavy soils, wet clay soils, etc.);
- soils rich in SO₄²⁻ sulphates, organic matter;
- damage to the coating.

The BioZinalium® coating features sanitary compliance certificates that certify its suitability for contact with potable water.

The internal coatings...

The cement mortar spun centrifugally inside the pipes

The standard internal protection of the NATURAL[®] pipes is composed of best furnace mortar cement applied by centrifugation and produced with potable water in conformity with the European Directive GB/33/CEE.

The centrifugal process offers the advantage of producing a compact mortar and a smooth internal surface.

This process results in the following properties:

- > low porosity of the mortar,
- > excellent adhesion of the cement,
- > low surface roughness.



The internal cement improves the flow

The internal surface of the cement mortar has low roughness, which improves flow and reduces head losses. This mortar guarantees consistent hydraulic performance over time (absence of deposits).

The roughness coefficient (COLEBROOK formula) of a pipe alone is $k = 0.03$. In practice however, SAINT-GOBAIN PAM recommends using the value $k = 0.1$ when designing networks, to take into account the singular head losses of a complete pipeline.

The internal cement protects the pipeline and potable water

> Protective mechanism

The internal cement coating does not act as a simple barrier but protects the ductile iron by a passivation mechanism: after being put into service, water gradually saturates the cement mortar and becomes richer in alkaline elements; on reaching the metal wall, it is no longer corrosive.

> Filling of cracks

Crazing, which can be seen on the surface of the mortar even when formed during transport, storage or laying, closes up under the combined effect of two reactions:

- swelling (fast) of the cement mortar on filling with water,
- hydration (slow) of the component elements of the cement.

Special cases

The PUR coating is available in the NATURAL[®] range

European Directive 98/83/CEE relating to water intended for human consumption sets water quality criteria. However, if the water transported is aggressive (hardness $< 5^{\circ}\text{F}$) or corrosive and if the residence time in the network is abnormally long (more than several days), or if the chemical composition must not change during transit in the pipeline (mineral water), the NATURAL[®] PUR should be used.

....preserving potable water

The cataphoresis epoxy coating for the fittings

NATURAL[®] is a coherent range: just like for the pipes, EXPRESS or STANDARD joint fittings are delivered with reliable coatings.

The protection of the fittings comes in the form of blue deposited epoxy coating with a regular thickness obtained through cataphoresis.



*Standard fitting
of the NATURAL[®]
range*

- > On leaving the foundry, cast parts are carefully shot-blasted before treatment.
- > The parts then undergo surface passivation (zinc phosphating) by passing through a bath.
- > A layer of blue epoxy resin is then electro-deposited by cataphoresis, producing a layer of highly regular thickness (especially on the corners, etc.).
- > The epoxy coating is 70 microns thick.



*Express fitting
of the NATURAL[®]
range*

The accessories



All parts implemented with the NATURAL[®] are protected:

- > ductile iron glands for EXPRESS joint by blue epoxy deposited by cataphoresis (70 µm),
- > ductile iron bolts for EXPRESS joint by black cataphoresis epoxy (70 µm),
- > ductile iron nuts for EXPRESS joint by galvanisation (70 µm),
- > branch collars and valves by epoxy powder coating.

Easy to assemble joints...


The choice of elastomers

The EPDM elastomers used for the joint gaskets are fully compatible with the transport of potable water and are selected by SAINT-GOBAIN PAM according to strict criteria taking into account their intrinsic physico-chemical characteristics and their durability over time. They ensure that the joints in the system are completely tight to internal and external pressures throughout the lifetime of the pipeline. The joint gaskets comply with standard NF EN 681-1

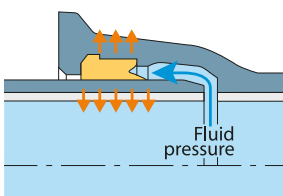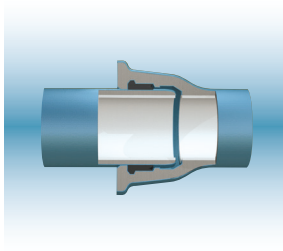

The STANDARD joint

The STANDARD joint is an automatic joint. The watertightness is produced by compression of the elastomeric gasket during assembly (by insertion of the spigot in the socket). The joint is designed so that the contact pressure between the elastomer and the ductile iron increases as the pressure in the pipeline increases. The pipe will burst before the joint leaks during a destructive pressure test.

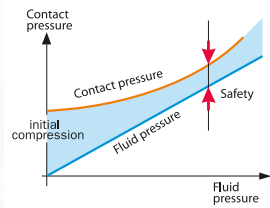

The EXPRESS joint for the fittings

The EXPRESS joint is a mechanical joint. The watertightness is achieved via radial compression of an elastomer joint gasket using a gland tightened by ductile iron bolts.

Little force is required to assemble the EXPRESS joint. The orientation and final positioning of the fitting are easy before tightening the bolts, making this joint highly appreciated in cramped conditions and during maintenance work.



The flexible joints

The STANDARD and EXPRESS joints can tolerate a high degree of angular deflection, to negotiate large radius curves without the need for fittings and adapt to any changes in layout. Combined with the end play, these joints can also absorb ground movement or expansions of small amplitude.



Angular deviation: 4° to 5°
with standard joint DN 100 to 600!

...and lockable joints



If you wish to know more about the locking, please check our **LOCKING** brochure

The Vi-solution for self-restrained pipelines

Self-anchored pipe and fitting joints (STANDARD Vi and EXPRESS Vi) can be used to produce self-restrained ductile iron pipelines. This solution is particularly interesting when construction of concrete thrust blocks would be difficult (land with poor cohesion, risk of future excavation work, problems of space) or when this would delay the project. The advantage of STANDARD Vi and EXPRESS Vi joints is that they can be fitted on any pipe or any fitting in the NATURAL[®] range.

The STANDARD Vi joint gasket for anchoring

The STANDARD Vi self-anchored joint gasket and the STANDARD joint gasket have an identical shape and are lodged in the same pipe socket. In addition, the STANDARD Vi gasket has metal inserts that cling to the spigot of the adjacent pipe after assembly and pressurisation.

It can be used from DN 60 to 600 for the pipes and from DN 350 to 600 for the fittings.

UNIVERSAL Standard for anchoring at very high and extreme pressures

When the network operating pressures exceed the performance of the STANDARD Vi or EXPRESS Vi systems, UNIVERSAL anchoring must be used.

In the UNIVERSAL range, sealing and restraint are achieved in two separate chambers in order to reach unequalled performance levels. UNIVERSAL is available for pipes and fittings.

UNIVERSAL Vi for very high pressures

Anchoring is obtained by a system of inserts housed in a chamber located upstream from the sealing chamber.

UNIVERSAL Ve for extreme pressures

Anchoring is obtained by a system comprising a metal ring housed in a chamber, located upstream from the sealing chamber, which presses against a metal bead on the spigot of the pipe or fitting.



NATURAL[®], a complete and...

The products of the NATURAL[®] range



Description	Junctions						
	Non-anchored		Anchored				
	Express	Standard	Express Vi	Standard		Universal	
				Vi	Ve	Vi	Ve
NATURAL [®] pipe	DN 100 - 300	DN 60 - 1000	DN 100 - 300	DN 60 - 600	DN 350 - 1000	DN 80 - 600	DN 100 - 1000
Double socket bend 1/4, 1/8, 1/16, 1/32	DN 60 - 1000	DN 60 - 1000	DN 60 - 300	DN 60 - 600	DN 60 - 1000	DN 80 - 600	DN 100 - 1000
Double socket tee with flanged branch	DN 60 - 1000 PN10, PN16, PN25	DN 60 - 1000 PN10, PN16, PN25	DN 60 - 300 PN10, PN16, PN25	DN 60 - 600 PN10, PN16, PN25	DN 60 - 1000	DN 100 - 600 PN10, PN16,PN25	DN 100 - 1000 PN10, PN16, PN25
All socket tee	DN 60 - 200	DN 60 - 600	DN 60 - 200	DN 200 - 600	DN 60 - 600	DN 100 - 300	DN 100 - 300
Double socket taper	DN 60 - 1000	DN 60 - 1000	DN 60 - 300	DN 200 - 600	DN 60 - 1000	DN 100 - 500	DN 100 - 500
Collar	DN 60 - 1000	-	-	-	-	DN 80 - 300 (anchored collar NAT-ALP)	-
Flanged socket	DN 60 - 1000	DN 60 - 1000	DN 60 - 300	DN 200 - 600	DN 60 - 1000	DN 80 - 600	DN 100 - 1000
Flanged spigot	DN 60 - 1000	DN 60 - 1000	DN 60 - 300	DN 200 - 600	DN - 350 - 1000	DN 80 - 600	DN 100 - 1000

➔ Other DN, contact us

Special coatings for extreme situations (contact us):

Coating
NATURAL[®] PUR
for aggressive
or mineral waters



Coating TT
(PE or PUX)
for very
corrosive soils



For more details, go to the
site www.pamline.com

... reliable range

STANDARD and EXPRESS joints - STANDARD Vi, STANDARD Ve and EXPRESS Vi joints

DN	Category	Standard		Express		Anchoring Standard Vi		Anchoring Standard Ve		Anchoring Express Vi	
		PFA* (bar)	Deviation (degree)	PFA* (bar)	Deviation (degree)	PFA* (bar)	Deviation (degree)	PFA* (bar)	Deviation (degree)	PFA* (bar)	Deviation (degree)
60	C40	40	5	40	5	22	5	-	-	22	4
80	C40	40	5	40	5	16	5	-	-	16	5 (New Vi)
100	C40	40	5	40	5	16	5	-	-	16	5 (New Vi)
125	C40	40	5	40	5	16	5	-	-	16	4
150	C40	40	5	40	5	16	5	-	-	16	5 (New Vi)
200	C40	40	5	40	4	16	4	-	-	16	3
250	C40	40	5	40	4	16	4	-	-	16	3
300	C40	40	5	40	4	16	4	-	-	16	3
350	C30	30	4	25	3	16	3	27	3	-	-
400	C30	30	4	25	3	16	2	25	3	-	-
450	C30	30	4	25	3	13	2	23	3	-	-
500	C30	30	4	25	3	11	2	22	3	-	-
600	C30	30	4	25	3	10	2	20	3	-	-
700	C25	25	4	25	2	**	**	-	-	-	-
800	C25	25	4	25	2	-	-	-	-	-	-
900	C25	25	4	25	1.5	-	-	-	-	-	-
1000	C25	25	4	25	1.5	-	-	-	-	-	-

* For use at high pressures to the indicated PFA, please use the Universal pipes or contact us

** Contact us

UNIVERSAL Vi and Ve joints

DN	Category	Anchoring Universal Vi		Anchoring Universal Ve	
		PFA (bar)	Deviation (degree)	PFA (bar)	Deviation (degree)
80	C100	60	3	**	**
100	C100	56	3	64	3
125	C64	52	3	64	3
150	C64	48	3	60	3
200	C64	43	3	52	3
250	C50	39	3	46	3
300	C50	34	3	41	3
350	C40	25*	3	38	3
400	C40	20	3	35	3
450	C40	16	3	32	3
500	C40	16	2	30	3
600	C40	16	2	30	2
700	C30	-	-	27	2
800	C30	-	-	25	2
900	C30	-	-	25	1.5
1000	C30	-	-	25	1.2

* It concerns only pipes

** Contact us

SAINT-GOBAIN PAM worldwide

ALGERIA

SAINT-GOBAIN PAM ALGERIE
Z.I. Sidi Abdelkader-Ben Boulaïd - BP 538
09000 - BLIDA - Algeria
Phone: + 213 (0) 25 36 00 60

ARGENTINA

SAINT-GOBAIN PAM ARGENTINA
Bouchard y Enz
1836 - LLAVALLOL - BUENOS AIRES - Argentina
Phone: + 54 11 42 98 9600

AUSTRALIA

SAINT-GOBAIN PAM
15 Edgars Road
THOMASTOWN VIC 3074 - Australia
Phone: + 61 (0) 3 9358 6122

AUSTRIA

**SAINT-GOBAIN GUSSROHRVERTRIEB
ÖSTERREICH GmbH**
Archenweg, 52
A-6020 - INNSBRUCK - Austria
Phone: + 43 512 341 717-0

BELGIUM

SAINT-GOBAIN PIPE SYSTEMS
Raatshovenstraat, n°2
B-3400 - LANDEN - Belgium
Phone: + 32 11 88 01 20

BRAZIL

SAINT-GOBAIN CANALIZACAO LTDA
Praia de Botafogo 440 7° andar
22250-040 - RIO DE JANEIRO - RJ - Brazil
Phone: + 55 21 2128 1677

CHILE

SAINT-GOBAIN PAM CHILE
Antillanca Norte 600
Parque Industrial Vespucio, Comuna de Pudahuel
SANTIAGO DE CHILE - Chile
Phone: + 562 444 13 00

CHINA

SAINT-GOBAIN PAM CHINA (SHANGAI)
7th Floor, Office Tower
Bund Center - 222 Yan'an Road (East)
200002 - SHANGAI - China
Phone: + 86 21 6361 2142

SAINT-GOBAIN PAM CHINA (XUZHOU)

Dong Jiao Yangzhuang
PC 221004 - XUZHOU - Jiangsu Province - China
Phone: + 86 516 8787 8107

SAINT-GOBAIN PAM CHINA (MAANSHAN)

Hua Gong Road Cihu
PC 243052 - MAANSHAN Anhui Province - China
Phone: + 86 555 350 8040

COLOMBIA

SAINT-GOBAIN PAM COLOMBIA
Terminal terrestre de carga de Bogota
Etapa 1, Bodega 9, Modulo 3
Km 3,5 costado sur autopista - Medellin
COTA CUNDINAMARCA - Colombia
Phone: + 57 (1) 841 5832

CZECH REPUBLIC

SAINT-GOBAIN PAM CZ s.r.o.
Počernická 272/96
108 03 Praha 10 - Czech Republic
Phone: + 296 411 746

FINLAND

SAINT-GOBAIN PIPE SYSTEMS OY
Nuijamiestentie 3A
FIN-00400 - HELSINKI - Finland
Phone: + 358 207 424 600

FRANCE & DOM-TOM

SAINT-GOBAIN PAM (HEAD OFFICE)
21, avenue Camille Cavallier
54705 PONT-A-MOUSSON CEDEX - France
Phone: +33 3 83 80 73 50

SAINT-GOBAIN PAM

(France Commercial Department)
CRD - Chemin de Blénod - B.P. 109
54704 PONT A MOUSSON CEDEX - France
Phone: +33 3 83 80 73 00

SAINT-GOBAIN PAM

(Europe and International Commercial Departments)
21 avenue Camille Cavallier
54705 - PONT A MOUSSON CEDEX - France
Phone: + 33 3 83 80 67 89

SAINT-GOBAIN PAM

(Local Agency of The Antilles)
Rue Alfred Lumière - ZI de Jarry - BP 2104
97122 - BAIE MAHAULT - Guadeloupe
Phone: + 33 590 26 71 46

GERMANY

SAINT-GOBAIN PAM DEUTSCHLAND
Saarbrucker Strasse 51
66130 - SAARBRUCKEN - Germany
Phone: + 49 681 87 010

GREECE

SAINT-GOBAIN SOLINOUREGIA
5 Klissouras Str.
GR 14482 - METAMORFOSI - ATHENS - Greece
Phone: + 30 210 28 31 804

HONG KONG

SAINT-GOBAIN PIPELINES
H15/F Hermes Commercial Centre - 4-4A Hillwood Road
TSIM SHA TSUI - KOWLOON - Hong Kong
Phone: + 852 27 35 78 26

INDIA

SAINT-GOBAIN PAM
Grindwell Norton Ltd
5th Level, Leela Business Park - Andheri-Kurla Road
MUMBAI - 400059 - India
Phone: + 91 22 402 12 121

ITALY

SAINT-GOBAIN PAM ITALIA SPA
Via Romagnoli n°6
I-20146 - MILAN - Italy
Phone: + 39 02 42 43 1

JORDAN

SAINT-GOBAIN PAM REGIONAL OFFICE
Abu Zaid Center - Office # 8
35 Saad Bin Abi Waqqas St, - PO BOX 831000
11183 AMMAN - Jordan
Phone: + 962 6 551 4438

KENYA

SAINT-GOBAIN DEVELOPMENT EAST AFRICA LTD
83, Muthithi Road
P.O. Box 17915-00500
Westland Nairobi - Kenya
Phone: + 254 7 31 02 12 35

MOROCCO

SAINT-GOBAIN MAROC DEVELOPMENT
2 allée des Figuiers - Ain Sebaâ
CASABLANCA - Morocco
Phone: + 212 522 66 57 31

MEXICO

SAINT-GOBAIN PAM MEXICO
HORACIO 1855-502 - Colonia Los Morales - Polanco
11510 - MEXICO D.F. - Mexico
Phone: + 52 55 5279 1657

NETHERLANDS

SAINT-GOBAIN PIPE SYSTEMS
Markerkant 10-17
1316 - AB ALMERE - Nederland
Phone: + 31 36 53 333 44

NORWAY

SAINT-GOBAIN PAM NORWAY
Brobekkeveien 84
N-0614 OSLO - Norway
Phone: + 47 23 17 58 60

PERU

SAINT-GOBAIN PAM PERU
Avenida de los Faisanes N° 157 - Chorillos
LIMA 09 - Peru
Phone: + 51 1 252 40 34/35

POLAND

**SAINT-GOBAIN CONSTRUCTION PRODUCTS POLSKA
SP Z.O.O - PAM Business Unit**
Ul. Cybernetyki 21
PL-02-677 WARSZAWA - Poland
Phone: + 48 22 751 41 72

PORTUGAL

SAINT-GOBAIN PAM PORTUGAL
Est. Nac. 10 - Lugar de D. Pedro -Apartado 1708
P-2690-901 - SANTA IRIA DE AZOIA - Portugal
Phone: + 351 218 925 000

ROMANIA

**SAINT-GOBAIN CONSTRUCTION PRODUCTS
ROMANIA S.R.L. - PAM Business Unit**
Str. Tipografilor nr. 11-15
S-Park/Corp - B3 B4 - Sector 1 - Cod 013714
BUCHAREST - Romania
Phone: + 40 21 207 57 37

SLOVAKIA

**SAINT-GOBAIN CONSTRUCTION PRODUCTS
PAM Business Unit**
Stara Vajnorska 139
83102 - BRATISLAVA - Slovakia
Phone: + 421 265 45 69 61

SOUTH AFRICA

**SAINT-GOBAIN CONSTRUCTION PRODUCTS
PAM Business Unit**
N1 Business Park
Corner Olievenhoutbosch Road & Old Johannesburg Road
Samrand - PO BOX 700
GERMISTON - South Africa 1400
Phone: +27 12 657 2800

SPAIN

SAINT-GOBAIN PAM ESPANA
C/ Principe de Vergara, 132 planta 7
28002 - Madrid - Spain
Phone: + 34 91 397 20 00

UNITED ARAB EMIRATES

SAINT-GOBAIN PAM GULF
Jebel Ali Free Zone, Plot S10817
POBOX 261484
Dubai - United Arab Emirates
Phone: + 971 4 8011 800

UNITED KINGDOM

SAINT-GOBAIN PAM UK
Lows Lane - Stanton-by-Dale
ILLKESTON - DERBYSHIRE - DE7 4QU
United Kingdom
Phone: + 44 115 930 5000

VIETNAM

SAINT-GOBAIN PAM VIETNAM
IPC TOWER / LEVEL9
1489 Nguyen Van Linh Street
District 7
HO CHI MINH CITY - Vietnam
Phone: +84 8 39 30 72 73

www.pamline.com
www.pamline.fr

SAINT-GOBAIN PAM

Head office

21, avenue Camille Cavallier
54705 PONT-A-MOUSSON CEDEX
FRANCE
Phone : +33 (0) 3 83 80 73 50
Fax : +33 (0) 3 83 80 76 60

Water - Sewage - Municipal Castings

Marketing

21, avenue Camille Cavallier
54705 PONT-A-MOUSSON CEDEX
FRANCE
Phone: +33 (0)3 83 80 67 89